

Absocold® ENERGY STAR® Qualified
Hospitality Refrigerator
2.0 cu. ft. Single-Door - Auto-Defrost



SUITE FRIDGE® ARD204A

 **Stainless Door/Black Cabinet**
Model: ARD204ABS14R/L

 **Black**
Model: ARD204AB14R/L



Suite Fridge® hospitality refrigerators are specifically designed for commercial hotel applications only and are *not intended for medical or consumer residential applications.*

KEY BENEFITS

- Fits most existing absorption-type unit cabinetry
- More energy and cooling efficient than absorption refrigerators
- Maintains 38°F at 75.2°F ±1.8°F ambient temperature
- Special QUICK CHILL 'N SNOOZE® Functions
- Environmentally safe - Non-Flammable R134A refrigerant & Non-Flammable foaming agent 245F
- Quiet Operation

FEATURES

Energy	ENERGY STAR® Qualified - Tier I 249 KWH/Yr Energy Consumption 10% less energy than Federal Standard
QUICK CHILL 'N SNOOZE®	Snooze Function (8 hours) Quick Chill Function (2 hours)
Defrost Type	Automatic Defrost
Door Type	Easy-Clean Euro-Round Door
Door Handle	Integrated Handle
Door-Swing	Reversible (Factory Standard, Right-Hand Hinge)
Interior Shelves	2 Full-Width Removable Shelves
Door Storage	Beverage Can Dispenser (5 cans) 2 Door Shelves
Cabinet Design	Fits Most Existing Absorption Unit Cabinetry Clean-Back Design
Leveling	2 Front Adjustable Leveling Feet
Capacity	2.0 cu. ft. Total Capacity

INSTALLATION REQUIREMENTS

Remove all packing material and tape. Install on a level floor or well-supported counter. Avoid any direct sunlight, heat source, or moisture. This product is designed to be *freestanding* and must be installed at least 2" from the wall, and the cabinet bottom is at least 3/4" to 1" above the floor or carpet, in order to let the air circulate freely around the unit.

Product specifications subject to change without notice


DIMENSIONS

Height	22 3/8 in.
Width	18 1/2 in.
Depth	19 in.
Weight	40 lbs.
Carton Height	23 1/2 in.
Carton Width	21 in.
Carton Depth	20 in.
Shipping Weight	44 lbs.
Shipping Cube	5.7 cu. ft.

ELECTRICAL

A minimum 15 AMP electrical supply is required (20 AMP electrical supply preferred). A time-delay fuse or circuit breaker and separate circuit is recommended. 115V., 60 Hz.

Running Amperage: 0.9 AMPS

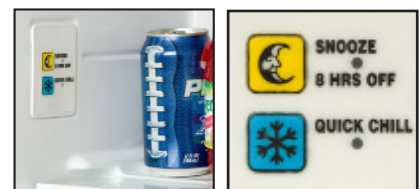

ARD204ABS



ARD204AB



Commerical UL® listing (File# SA11117)

Patent, Copyright and Trademark Information
This product is covered by US Patent #7,634,918.
Other US Patents Pending.

Absocold Corporation, P.O. Box 1545, Richmond, IN 47375
Toll-Free: 800-843-3714 • Fax: 765-935-3450
www.absocold.com • absocold@absocold.com